


# Wymiary – Uchwyty Tigrip, producent Yale, model TBL 4,0 - 30,0 (SL)



Typ	Nośność	Zakres grub. blach mm	Waga kg	A mm	B mm	Ø C mm	D mm	E mm	F mm	G mm	H mm	Nr kat.
TBL 4,0 S	4,0	0 - 32	12,0	197	339	80	68	93	110	20	32	5010.0005
TBL 4,0 L	4,0	30 - 60	18,0	228	339	80	68	100	110	20	32	5010.0006
TBL 6,0 S	6,0	0 - 50	21,0	293	442	89	95	143	129	20	35	5010.0021
TBL 6,0 L	6,0	50 - 100	28,0	362	482	89	114	143	129	20	35	5010.0008
TBL 8,0 S	8,0	0 - 50	26,0	293	450	89	95	143	129	20	42	5010.0022
TBL 8,0 L	8,0	50 - 100	32,0	362	482	89	114	143	129	20	42	5010.0023
TBL 10,0 S	10,0	0 - 50	30,0	293	503	110	95	143	139	25	45	5010.0024
TBL 10,0 L	10,0	50 - 100	37,0	362	503	110	114	143	139	25	45	5010.0025
TBL 12,0 S	12,0	0 - 50	54,0	360	550	130	125	162	154	30	55	5010.0026
TBL 12,0 L	12,0	50 - 100	64,0	460	615	130	175	162	154	30	55	5010.0027
TBL 15,0 S	15,0	0 - 50	73,0	360	550	130	125	162	204	45	55	5010.0015
TBL 15,0 L	15,0	50 - 100	87,0	460	615	130	175	162	204	45	55	5010.0016
TBL 20,0 S	20,0	0 - 65	123,0	462	674	130	165	210	235	45	65	5010.0017
TBL 20,0 L	20,0	65 - 130	135,0	560	724	130	195	210	235	45	65	5010.0018
TBL 30,0 S	30,0	0 - 65	195,0	462	667	60	165	210	295	65	66	5010.0019
TBL 30,0 L	30,0	65 - 130	256,0	560	732	60	195	210	295	65	67	5010.0020

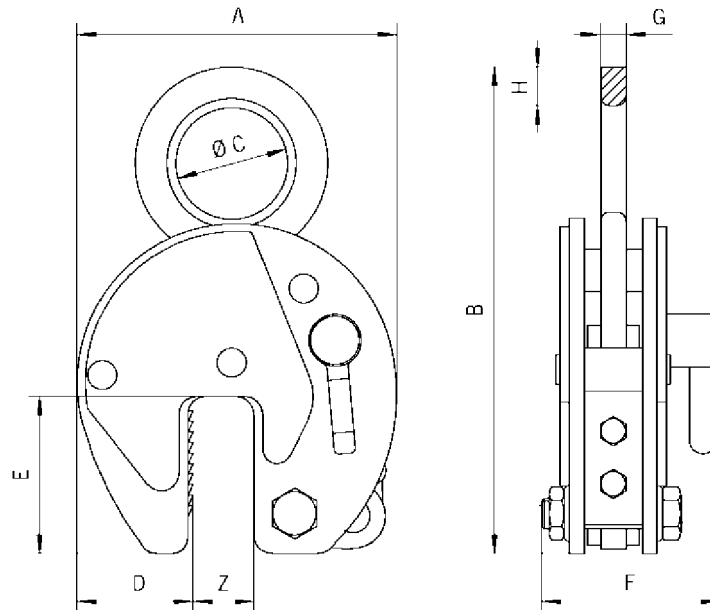

**OROME**

Ul. Pułaskiego 17, 46-200 Kluczbork  
 Tel. +48 77 417 05 06, Fax +48 77 544 93 23

[www.orome.pl](http://www.orome.pl) [orome@orome.pl](mailto:orome@orome.pl)

